


INTERNATIONAL DRYING CORPORATION

INSTALLATION GUIDE for Stainless Steel Dryer w/Dual-Motor Top Duct

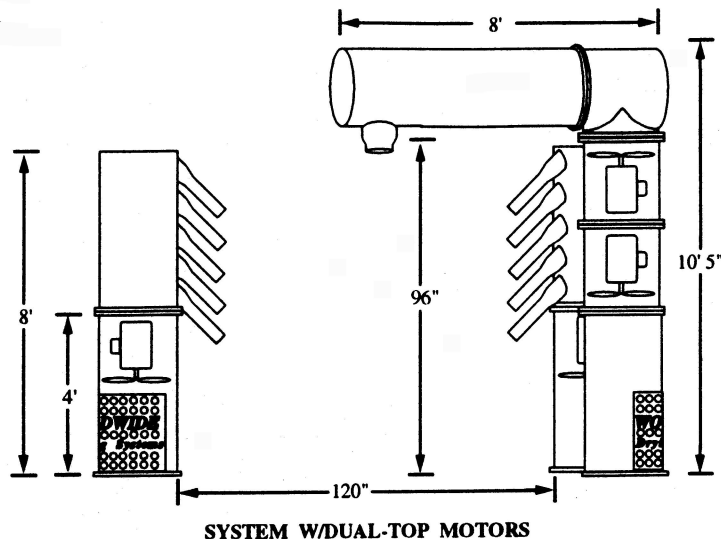

Motors: TEFC, 1.3 Service Factor, 3550 RPM. Factory extended leads.

Amp Draw: 27 Amp - 10 HP - 230 Volt

32 Amp - 15 HP - 230 Volt


Amperage will vary with elevation and air density.

Starters: 10 or 15 HP - Nema Size 2

Material: Intake/producter - Polished Stainless Steel, 11 ga., Type 304

Ducts - 16 ga. Polished Stainless Steel, Type 304

Nozzles - Molded polymer

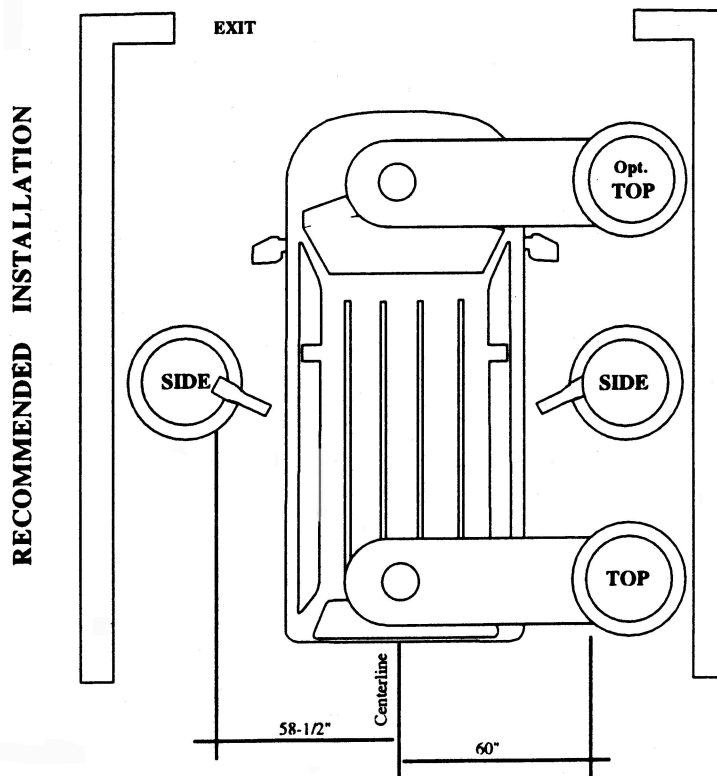

*Recommend two feet (2') between side column base and top duct motor base.