


# INTERNATIONAL DRYING CORPORATION

## INSTALLATION GUIDE for Molded Resin Dryer

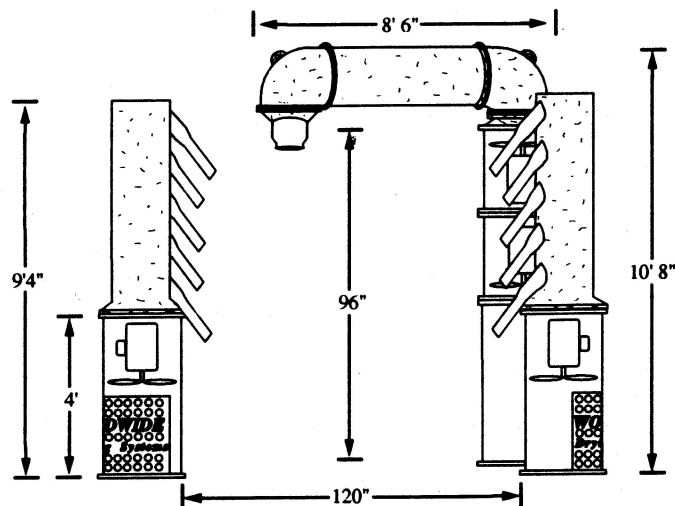

Motors: TEFC, 1.3 Service Factor, 3550 RPM. Factory extended leads.

Amp Draw: 27 Amp - 10 HP - 230 Volt  
32 Amp - 15 HP - 230 Volt


Amperage will vary with elevation and air density.

Starters: 10 or 15 HP - Nema Size 2

Material: Intake/producer - Polished Stainless Steel; 11 ga., Type 304

Ducts - Molded resin

Nozzles - Molded polymer

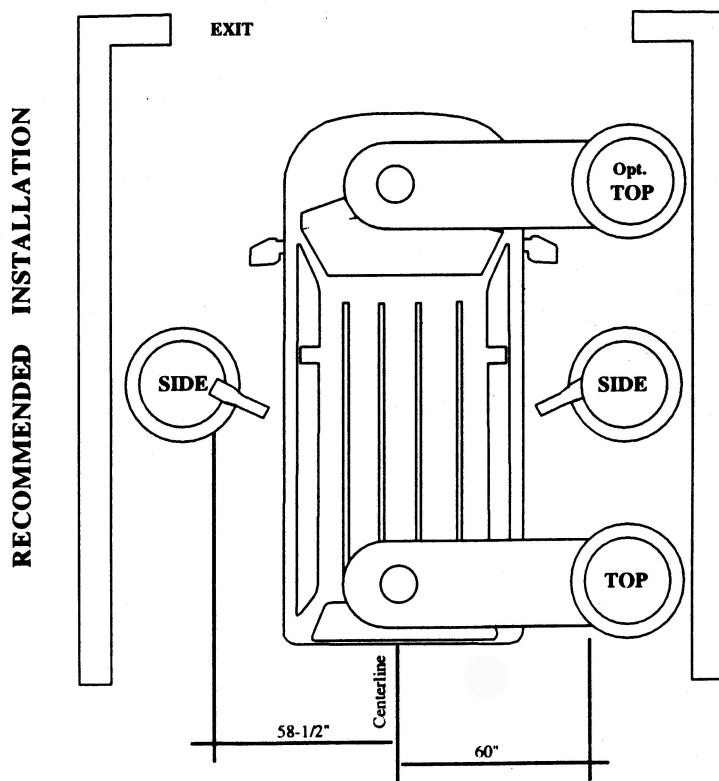

\*Recommend two feet (2') between side column base and top duct motor base.